

NEW

SX-2001A Digital Cinema Server

The stunning solution for both 2K and 4K Digital Cinema



Touch Panel Control



SX-2001A Digital Cinema Server

GDC Technology is proud to introduce the new **SX-2001A Digital Cinema Server with built-in Media Block**, our fifth generation digital cinema playback server designed to fully comply with DCI specifications and FIPS-140 security requirements.

The SX-2001A can support both 2K and 4K resolutions that is future-proof based on Texas Instrument's Enhanced DLP Cinema® technology, retaining all of the attractive SA-2100A's features such as:

- 2K/4K DCI MXF JPEG2000 playback
- DCI MXF JPEG2000 3D playback
- MPEG2 MXF Interop playback
- FIPS-140 Certified Media Block
- DCI approved forensic watermarking
- HDTV live streaming capabilities
- Highly stable Linux-based operating system
- Ingest of Digital Cinema Packages (DCPs) via physical media, network and satellite

In addition, the SX-2001A offers increased storage capacity and flexibility with the following unique features standard.

Unique Features

Supports NEC, Christie and Barco Series 2 Projectors

The SX-2001A is ready to support series 2 projectors and provide higher processing performance support for applicable DCI requirements and enhanced security for content protection.

Subtitle Overlay Support on Server

The SX-2001A is capable of rendering multiple-language subtitles and overlaying them over the picture in real-time without relying on the subtitle-rendering features of projectors.

Closed Captioning Support

The SX-2001A facilitates greater access to motion pictures by displaying closed captions from DCPs on WGBH's Rear Window Captioning devices.



Redundant Hot Swappable Up to 4TB Storage (Optional)

Up to 4TB of content storage. The SX-2001A uses 3 redundant hot swappable drives that can be easily attached or detached. The SX-2001A is able to remain operational in the event of a single drive failure and minimizes downtime.



Instant playback from CRU drive sleds *

The SX-2001A allows for instant playback from the CRU drive sleds without requiring content ingest. This significantly reduces time to screening in emergency situations.



Swapping of data drives for immediate content playback

The SX-2001A allows instant transfer of data drives (i.e. HDD) between servers, making a movie to move quickly from one screen to another.

Automation Compatibility

The SX-2001A allows bi-directional communication with theatre devices such as cinema control systems, cinema sound processors and cinema projectors, hence making automation of these devices possible and achieving substantial reduction in setup time and possible human errors.

Support of Performance Log

Ensures performance-related information is captured during the playback of shows is properly logged in a standard format for later retrieval. The log records are digitally signed to prevent tampering.

FIPS 140-2 Certified Media Block

The SX-2001A ships with a FIPS 140-2 Level 3 Certified Media Block providing the highest level of security recommended by DCI.



Instant playback from TMS Library

The SX-2001A allows for instant playback from the TMS content library to the server. This makes available huge amount of content storage for playback, providing flexibility for show management.



Remote Access of the Screen Management System

Cinema operators can remotely access the SX-2001A using the Theatre Management System (TMS) and Screen Management System (SMS) from a Windows® PC and other mobile devices such as Apple® iPhone™.



Incorporation of RealD 3D EQ Technology

The availability of RealD's 3D EQ ghostbusting technology in the SX-2001A allows for superior 3D presentations and facilitates seamless integration with RealD 3D exhibition systems.

Optional Feature



Quad Link Option (SX-2001AQ) ❖

The SX-2001A can also be upgraded to the SX-2001AQ which features four HD-SDI outputs. This option enables the SX-2001AQ to be used for:

- Highest quality 3D playback with dual stream 12-bit 4:4:4 output images to two projectors simultaneously

Model **SX-2001A**





GDC Technology Offices

Singapore

6 Changi South Street 2,
Fedex Building, Level 7,
Singapore 486349
Tel: +65 6222 1082
Fax: +65 6222 1089

China Hong Kong SAR

Unit 1-7, 20th Floor,
Kodak House II,
39 Healthy Street East,
North Point, Hong Kong
Tel: +852 2579 1070
Fax: +852 2579 1131

China Beijing

Rm. 518-520, Tower B,
No.11 De Wai Street,
Xi Cheng District,
Beijing, P.R. China 100088
Tel: +86 10 6205 7040
Fax: +86 10 6205 7054

China Shenzhen

Block B, Yuehaimen Square,
No. 2292-2300 Nanhai Blvd.,
Shenzhen, P.R. China 518052
Tel: +86 755 8611 0889
Fax: +86 755 8611 0899

USA

3500 W Olive Ave.,
Suite 940, Burbank,
California, CA 91505
Tel: +1 877 743 2872
Fax: +1 877 643 2872

Email: info@gdc-tech.com

Website: www.gdc-tech.com

Copyright © 2010
GDC Technology Limited
All rights reserved.

All trademarks listed in this
brochure are properties of
their respective owners.

Specifications are subject
to change without notice
due to ongoing product
development and
improvement.

GDC manufacturing
facility is
ISO 9001: 2000 certified.



PB-0031-1002-V1E

SX-2001A Digital Cinema Server Technical Specifications

Physical

Dimensions 485.8 (W) x 610 (D) x 177 (H) mm 4RU
Weight 25kg (55lbs)

Environmental

Operating temperature 5° to 40°C (41° to 104°F)
Operating humidity 20% to 90%, non-condensing
Operating altitude 10,000ft. above sea level

Power

Power requirement 100 to 240V AC ± 10%,
50/60Hz (15A max.)
Max power consumption 300W
Redundant power supplies Redundant internal hot swappable x 2
Uninterrupted power supply (UPS) with surge protection (optional) 3-way, meets IEEE STD 587 Cat. A 6KV test

Video Performance

Formats (MPEG) 1280 x 720, 1280 x 1024, 1920 x 1080,
1920 x 1080, 1998 x 1080, 2048 x 858,
2048 x 1080, 4096 x 2160
Formats (JPEG) 23.98, 24, 25, 29, 29.97, 30, 50, 59.94,
60 fps
Frame rates (MPEG) 23, 24, 48 (3D), 25, 29, 30 (HD)
Compression JPEG2000, MPEG2 MXF Interop
Packaging DCI Digital Cinema Package (DCP), DSR™

Video Output

Single link HD-SDI SMPTE 292M 10-bit 4:2:2 YUV
Dual link HD-SDI SMPTE 372M 12-bit 4:4:4 RGB/X'Y'Z',
Dual SMPTE 292M 10-bit 4:2:2 YUV
(for 3D playback)
Quad link HD-SDI ❖ Dual SMPTE 372M 12-bit 4:4:4 RGB/X'Y'Z',
(optional) (for 3D or dual 2D playback)

Audio Output

Digital uncompressed audio 16 channels (XLR-M x 8, AES/EBU)
48/96 KHz, 16-bit/24-bit
D-sub 26-pin
Audio Offset +/- 500 frames

System Interfaces

Ethernet 2 x RJ-45
(1 x 10/100 BaseT,
1 x 1000 BaseT)
USB2.0 6 x USB A-Type male

16-port GPI/Os
DVD-ROM drive *
HDD sled *
DVB-ASI (optional)

D-sub 37-pin
Read speed 8x
CRU-Dataport DX 115
BNC, CENELEC
EN 50083-9 standard
270Mbps < 2.8ppm
D-sub 9-pin
Modem Interface with remote sensing software

RS232
Modem Interface with remote sensing software

Storage

Storage Redundant hot swappable 2000GB (Upgradeable to 4000GB)

Security

AES 128-bit encrypted data storage
GDC conditional access system
Thomson NexGuard® forensic watermarking
FIPS 140-2 Level 3

Subtitles

Instant subtitle overlay on server

Reference I/O

Analog Genlock Bi-level, Tri-level

User Interface

Server Built-in Touch Panel Control (optional) Integrated Control of digital cinema servers and DLP Cinema® projectors
External Stand-alone Touch Panel Control (optional) Integrated Control of digital cinema servers and DLP Cinema® projectors
Windows® PC Network Control Remote access to the screen management system (SMS) and server user interface

Language Versions

English
Simplified Chinese
Traditional Chinese
Korean
Japanese
Spanish

Third-Party Integration Options


CineDigm Theatre Command Center® v3
Library Management Server®
RealD RealD 3D EQ
Dolby Dolby 3D
WGBH Rear Window Captioning Device

SX-2001 Series Digital Cinema Server

The SX-2001 Digital Cinema Server is available in various configurations to suit the differing needs of cinema owners. Cinemas that already utilize a theatre management system (TMS) will find the SX-2001T and SX-2001TQ a cost efficient choice. Meanwhile, cinemas not using TMS can benefit from the increased ingest options available in both the SX-2001A and SX-2001AQ.


Model No.	SX-2001	SX-2001Q	SX-2001T	SX-2001TQ	SX-2001A	SX-2001AQ
Description	Basic Model	Basic Model with Quad-Link	Advanced Model for TMS Integration	Advanced Model with Quad-Link for TMS Integration	Advanced Model	Advanced Model with Quad-Link
DVD-ROM Drive					•	•
HDD Sled					•	•
Redundant Power Supply			•	•	•	•
GPI/O			•	•	•	•
Hot-Swappable HDD x 3 units			•	•	•	•
Quad-Link HD-SDI		•		•		•

* Only available in SX-2001A and SX-2001AQ ❖ Also available in SX-2001Q and SX-2001TQ

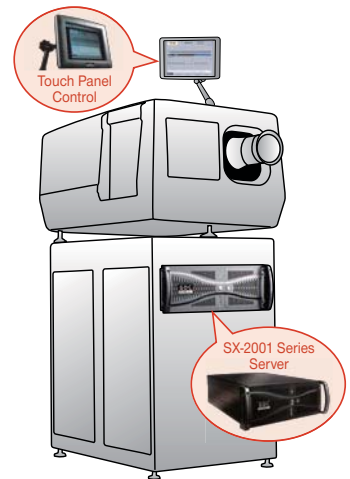


Series 2 DLP Cinema® projector with SX-2001 Series server


SX-2001 Series Digital Cinema Server Technical Drawings



Front View



Side View



Back View